ASI Technologies

Best Solutions to meet your needs

TECHNICAL DATA SHEET

ASI2060-450

Co-Solvent Vapor Degreaser · Two-Chamber · Internal Automatic Basket Elevator

P/N 62050	**Document** TDS-62050	**Rev.** 05	**Date** 12 Nov 2026



Main function

The **ASI2060-450** is a two-chamber co-solvent vapor degreaser (boil and rinse chambers) with Spray Under Immersion (SUI), dedicated circulation and filtration per chamber, vapor zone and dryer zone, and two refrigeration systems with three cooling zones.

An **internal automatic basket elevator** transfers the basket through the process with the machine hermetically closed during the cycle, minimizing solvent loss. Full control by PLC and HMI touch screen.

450×250×250	500×300×300	SUI × 2	−30 / +5 °C	Internal elevator
Basket (mm)	Tank, nominal (mm)	Boil + rinse chambers	3 cooling zones	Closed-lid transfer

Key Features

- Two-chamber design: boil chamber and rinse chamber, vapor zone and dryer zone
- Basket **450 × 250 × 250 mm**; 2 standard baskets supplied
- Spray Under Immersion (SUI) in both chambers
- Circulation pump 50 L/min with 10 µm filtration in each chamber
- 2 refrigeration systems, 3 cooling zones: −30 °C middle coils, +2…+5 °C upper and lower coils
- **Internal automatic basket elevator**; hermetically closed during the cycle
- **Programmable basket oscillation** (standard)
- Minimum 100% freeboard; water separator
- Tank and all wetted parts SUS316; external structure SUS304
- PLC and HMI touch-screen control
- Compatible with non-flammable halogenated solvents (co-solvent and mono-solvent processes)

תקציר בעברית: ASI2060-450 – מכונת דגריזר באדי ממס (Co-Solvent) דו-תאית (תא רתיחה ותא שטיפה) עם מעלית סל פנימית אוטומטית ותנודת סל מתוכנתת כחלק מהציוד הבסיסי; המכונה סגורה הרמטית במהלך המחזור. סל 450×250×250 מ"מ (2 סלים), שטיפת SUI בשני התאים, משאבת סחרור 50 ליטר לדקה וסינון 10 מיקרון בכל תא, 2 מערכות קירור ו-3 אזורי קירור (עד מינוס 30 מעלות), מפריד מים, חלקים רטובים מ-SUS316, בקרת PLC ומסך מגע HMI.


AIM Solder Israel Ltd. · ASI Technologies
Netzer Sereni, 70395 ISRAEL · contact@asi-tech.co.il · +972-8-9208844


www.asi-tech.co.il/4714

Specifications	
Parameter	**Value**
Configuration	Two chambers (boil and rinse) with vapor zone and dryer zone
Tank size (nominal)	500 × 300 × 300 mm per chamber
Chamber internal dimensions	Rinse (cold): 505 × 345 × 350 mm; boil (hot): 505 × 345 × 340 mm
Liquid level	Rinse chamber 17–62 L; boil chamber 17–42 L (without water separator)
Initial solvent charge (typical)	122 L (82 L HFE + 40 L co-solvent)
Vapor zone / dryer zone	1048 × 200 × 415 mm each
Basket	450 × 250 × 250 mm; 2 standard baskets
Cleaning	Spray Under Immersion (SUI) in boil and rinse chambers; programmable basket oscillation (standard). Option: ultrasonic unit in the rinse chamber (40 kHz, 300 W), P/N 62060
Circulation & filtration	Pump 50 L/min + 10 µm filter in each chamber
Heating	3 kW (boil chamber)
Distillation rate	60 L/h
Cooling	2 refrigeration systems, 3 cooling zones: −30 °C (middle coils), +2…+5 °C (upper and lower coils)
Water separator	250 × 130 × 150 mm, 5 L
Materials	Tank, tubes and wetted parts SUS316; external structure SUS304
Control	PLC and HMI touch screen
Automation	Internal automatic basket elevator with programmable basket oscillation; hermetically closed during the cycle
Power supply	380 V, 3-phase; most machines use a 16 A supply panel and a 16 A cable (not 25 A)
Overall dimensions (W × D × H)	2105 × 1005 × 1270 mm (1410 mm to top of lid mechanism)
Shipping weight	approx. 800 kg

Ordering information	
Description	**ASI P/N**
ASI2060-450 co-solvent vapor degreaser, two-chamber, internal basket elevator, 2 baskets	62050
Option: ultrasonic unit in the rinse chamber (40 kHz, 300 W)	62060

General views and dimensions (mm) · internal construction – cooling zones and liquid levels

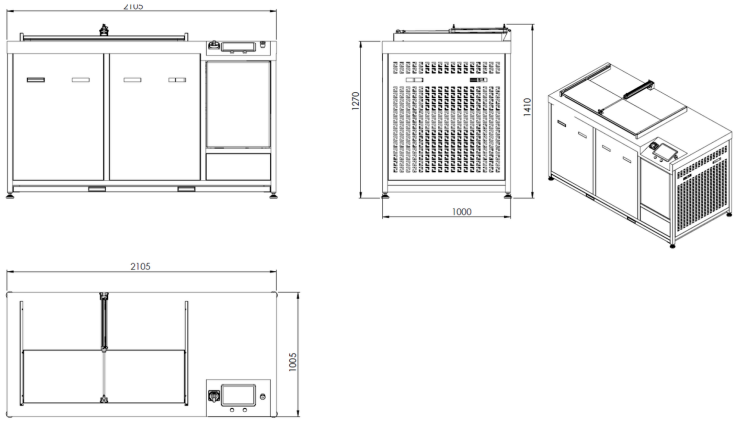

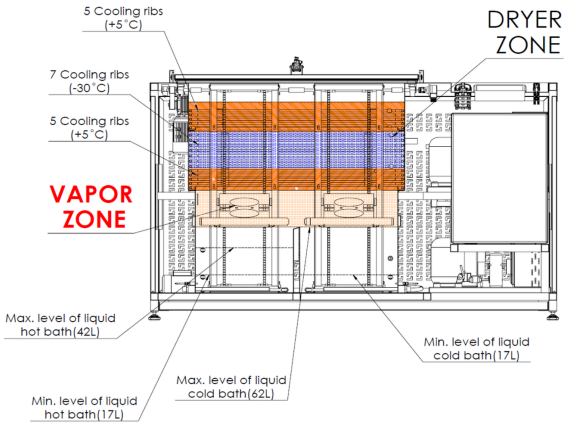

Specifications are subject to change without notice. Rev. history: Rev 01: first issue, v2 format | Rev 02: programmable basket oscillation clarified as standard equipment | Rev 03: ultrasonic option P/N 62060 added to ordering information | Rev 04: power supply corrected: most machines use a 16 A supply panel and 16 A cable (not 25 A) | Rev 05: עדכון עיצוב, ללא שינוי טכני